


Specifications

Model			PNLC652	PNLC752	PNLC862
Installation			Landscape		
LCD Panel			65" Class (64.5" diagonal) TFT LCD	75" Class (74.5" diagonal) TFT LCD	86" Class (85.6" diagonal) TFT LCD
			3,840 x 2,160 pixels		
			1.07 billion colours		
			0.372 mm (H) x 0.372 mm (V)	0.430 mm (H) x 0.430 mm (V)	0.494 mm (H) x 0.494 mm (V)
			400 cd/m ²		
			1,200 : 1		
			178°/178° (CR≥10)		
			Active Screen Area (W x H) (approx.)		
Response Time			8 ms (grey to grey, avg.)		
Backlight			LED, direct lit		
Touchscreen			IR (Infrared blocking detection method) with Zero-Bonding technology		
			USB (3.0 compliant) (Type B) x 2 (Front x 1, Rear x 1)		
			Supplied from main unit		
			20 points		
			Thickness: Approx. 3.2 mm Shock resistance: 130 cm ⁻³		
			Dual-sided passive pen x2		
Terminals ⁻⁴	Input	Front	HDMI (HDCP2.3 compatible, CEC compatible) x 1		
		Rear	HDMI (HDCP2.3 compatible, CEC compatible) x 2, USB Type-C (DisplayPort 1.2 Alt mode, HDCP 2.3, USB Power Delivery 65W compatible, Touch signal, USB pass through) x 1, Display Port (DisplayPort 1.2, HDCP compatible) x 1, Mini D-sub 15-pin x 1, AV mini jack x 1, 3.5 mm-diameter mini stereo jack x 1		
	Output	Rear	HDMI x 1, 3.5 mm-diameter mini stereo jack x 1, S/PDIF x 1		
		Front	USB 3.0 Type A x 2, USB 3.0 Type B (for touch) x 1		
		Rear	USB 3.0 Type A x 2, USB 3.0 Type B (for touch) x 1, LAN port (10Base-T/100Base-TX/1000BASE-T) x 1, RS-232C IN x 1		
		System	Arm® Cortex® - A55 processor (quad core)		
System			4GB		
			18GB		
			IEEE802.11ac/n/a/g/b (Use Wireless USB Adapter)		
			OPS Slot (19 V, 4.74 A, 90 W)		
Expansion Slot			15 W + 15 W w/front facing speakers		
Speaker Output			4 points, 800 x 600 mm pitch, M8 screw		
Mounting			4 points, 600 x 400 mm pitch, M8 screw	4 points, 800 x 400 mm pitch, M8 screw	4 points, 800 x 600 mm pitch, M8 screw
Power Supply ⁻⁵			100V ~ 240 V AC, 50/60 Hz		
Power Consumption (Factory Setting (Shipment) / Max rating)			180 W / 390 W	200 W / 420 W	260 W / 500 W
Environmental Conditions	Operating Temperature ⁻⁶		41 °F to 95 °F (5 °C to 35 °C)		
	Operating Humidity ⁻⁷		20% to 80% RH (no condensation)		
Dimensions (W x D x H) (approx.)			59.5 x 3-3/8 x 36-1/8 inch	67-13/16 x 3-7/16 x 40-5/8 inch	77-1/2 x 3-7/16 x 46-1/16 inch
Weight (approx.)			84.9 lbs.	112.4 lbs.	143.3 lbs.
Packaging Dimensions (W x D x H) (approx.)			66-5/16 x 8-7/8 x 44-7/16 inch	75-13/16 x 8-7/8 x 49 inch	86 x 8-7/8 x 56-1/4 inch
Packaging Weight (approx.)			133.4 lbs.	166.4 lbs.	207.2 lbs.
Bezel width			21.9 mm (Left, Right, Top), 53.2 mm (Bottom)		
Main Accessories			AC power cord, remote control unit, remote control unit battery (AAA size) x 2, set-up manual, blank sticker, cable clamp x 3, USB cable, pen tray, touch pen x 2, Wireless Adapter		


^{*1} Without Glass. Brightness depends on input mode and other picture settings. Brightness level will decrease slightly over the lifetime of the product. Due to the physical limitations of the equipment, it is not possible to maintain a precisely constant level of brightness. ^{*2} excluding the touch sensor part around the LCD panel. ^{*3} Approximate distance at which the glass panel can withstand the impact of a 500-gram iron ball dropped on its centre. ^{*4} Use a commercially available connection cable for PC and other video connections. ^{*5} The AC power cord is an inlet type. The cable is bundled (3 pins). ^{*6} Temperature conditions may change when using the monitor together with the optional equipment. In such cases, check the temperature conditions specified by the optional equipment. ^{*7} Check the requirements of the computer and other devices to be connected, and make sure that all requirements are satisfied.

Dimensions

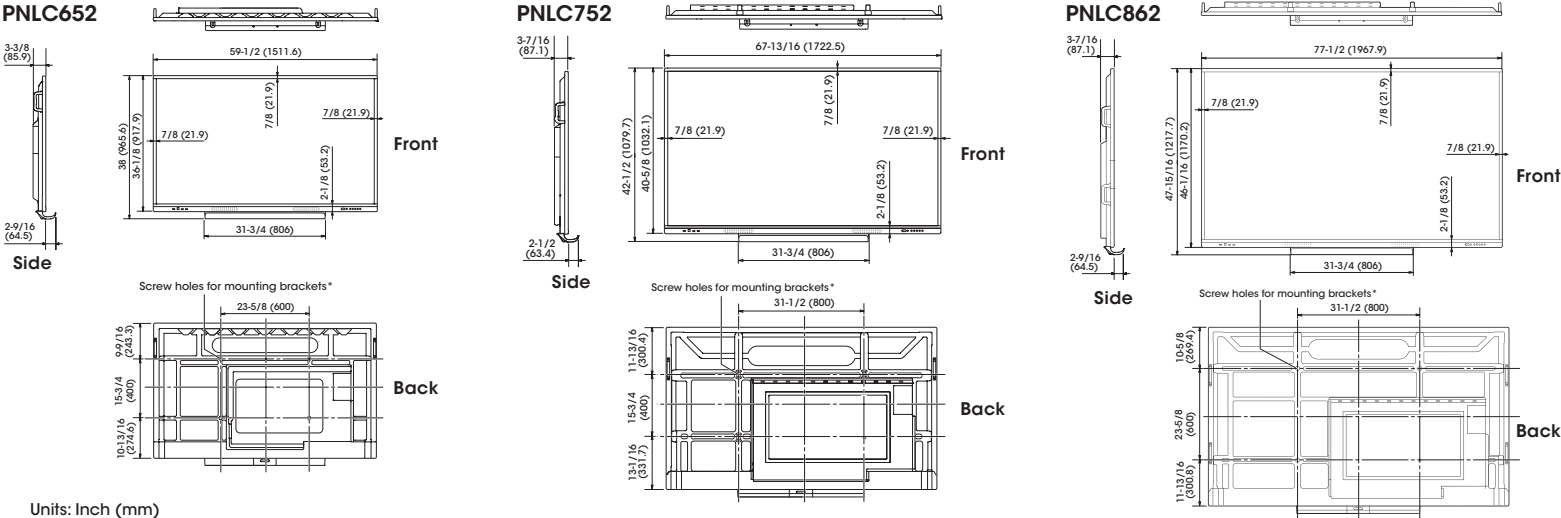

Units: Inch (mm)

Optional PNZCMS1 AV Soundbar



zoom Certified

PNZCMS1 AV Soundbar Specifications					
Camera	Pixels	12MP	Microphone	Voice Pickup Range	8 metres
	Field of view	120°		Mic Array	6 Elements
	Zoom	Max. 5x		Output Power	8 watts
	Resolution	Max. 3,840 x 2,160			
Adjustable Angle		Up 15°, Down 15° (manual)			



SHARP ELECTRONICS OF CANADA LTD.
335 Britannia Road East, Ste. 101
Mississauga, Ontario L4Z 1W9
1-800-567-4277 • www.sharp.ca

Printed in Canada.
VSG-VS-PNLC-E-PDF-08/2023

Sharp, AQUOS BOARD, and all related trademarks are trademarks or registered trademarks of Sharp Corporation and/or its affiliated companies. The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. All other brand names and product names may be trademarks or registered trademarks of their respective owners. Design and specifications are subject to change without prior notice.