


Model Name	PNC861H	PNC751H	PNCE701H
Installation	Landscape		
LCD Panel	86" Class (85 9/16" diagonal) LCD	75" Class (74 1/2" diagonal) LCD	70" Class (69 1/2" diagonal) LCD
Max. Resolution	3,840 × 2,160 pixels		
Max. Display Colours (approx.)	1.07 billion colours		
Pixel Pitch (H × V)	0.4935 × 0.4935 mm	0.4296 × 0.4296 mm	0.40075 × 0.40075 mm
Max. Brightness (average)*1	400 cd/m ²		350 cd/m ²
Contrast Ratio	1,200 : 1		4,000 : 1
Viewing Angle (H/V)*2	178°/178° (CR ≥ 10)		176°/176° (CR ≥ 10)
Active Screen Area (W × H) (approx.)	74 5/8" × 41 15/16"	64 15/16" × 36 9/16"	60 9/16" × 34 1/16"
Response Time	8 ms (grey to grey, avg.)		
Backlight	LED, direct lit		
Touchscreen	IR (infrared blocking detection method)		
PC Connection Port	USB (2.0 compliant) (Type B) × 2 (Front × 1, Rear × 1)		
Power Supply for Touch Panel	Supplied from main unit		
Multi Touch	20 points		10 points
Protection Glass	Thickness: Approx. 4.0 mm Shock resistance: 130 cm ⁻³		
Touch Pen	Function Button: N/A (passive pen)		
Computer Input	Video: Analog RGB (0.7 Vp-p) [75Ω], HDMI		
Synchronization	Horizontal/vertical separation (TTL: positive/negative)		
Plug & Play	VESA DDC2B		
Video Colour System	NTSC (3.58 MHz)/NTSC (4.43 MHz)/PAL/PAL60 /SECAM		
Input Terminals*4	Front: HDMI (HDCP2.2 compatible, HDR10 supported) × 1		HDMI (HDCP2.2 compatible, HDR10 supported) × 1, 3.5 mm-diameter mini stereo jack × 1
Rear	PC analog: Mini D-sub 15-pin × 1, HDMI (HDCP2.2 compatible, HDR10 supported) × 2, 3.5 mm-diameter mini stereo jack × 1, AV mini jack × 1, Component mini jack × 1, RS-232C × 1		PC analog: Mini D-sub 15-pin × 2, HDMI (HDCP2.2 compatible, HDR10 supported) × 2, 3.5 mm-diameter mini stereo jack × 2, AV RCA × 1*5, Component RCA × 1*5, Audio RCA × 1, RS-232C × 1
Output Terminals*4	3.5 mm-diameter mini stereo jack × 1, SPDIF × 1		
System	CPU: Arm® Cortex®-A53 processor (quad core)		
Memory	1 GB		1.5 GB
Internal Storage	8 GB		
External Interface	Front	USB port (2.0-compliant, main unit & OPS) × 1	
Rear	LAN port (10BASE-T/100BASE-TX) × 1, USB port (2.0-compliant, main unit) × 2		LAN port (10BASE-T/100BASE-TX) × 1, SD card slot (SD/SDHC) × 1, USB port (2.0-compliant, main unit) × 3
Wireless LAN	Compliant with IEEE802.11ac/n/a/g/b		
Expansion Slot	19 V, 4.74 A (power supplied when expanding the functions with an optional part)		
Speaker Output	10 W + 10 W		
Mounting	4 points, 700 × 400 mm pitch, M8 screw	4 points, 600 × 400 mm pitch, M8 screw	4 points, 600 × 400 mm pitch, M6 screw
Power Supply*5	100 V – 240 V AC, 50/60 Hz		
Power Consumption*7	530 W	460 W	400 W
Environmental Conditions	Operating Temperature*8: 5°C to 35°C		
Operating Humidity*9	20% to 80% RH (no condensation)		
Dimensions (W × D × H) (approx.) (display only)	78 1/4" × 4 7/16" × 46 1/4"	68 5/16" × 4 1/8" × 40 13/16"	64 1/8" × 3 15/16" × 39"
Weight (approx.)	176.4 lbs	134.5 lbs	119 lbs
Main Accessories	AC power cord, remote control unit, remote control unit battery (AAA size) × 2, set-up manual, blank sticker, cable clamp × 3, USB cable, pen tray, SHARP Pen software (CD-ROM), touch pen × 2, wireless adapter		

*1 Brightness depends on input mode and other picture settings. Brightness level will decrease slightly over the lifetime of the product. Due to the physical limitations of the equipment, it is not possible to maintain a precisely constant level of brightness. *2 Excluding the touch sensor part around the LCD panel. *3 Approximate distance at which the glass panel can withstand the impact of a 500-gram iron ball dropped on its centre. *4 Use a commercially available connection cable for PC and other video connections. *5 Composite video and component cannot be used simultaneously. *6 The AC power cord is an inlet type. The cable is bundled (3 pins). *7 When an option is installed on the expansion slot. When not installed: PNC861H: 420 W, PNC751H: 360 W, PNCE701H: 295 W *8 Temperature conditions may change when using the monitor together with the optional equipment. In such cases, please check the temperature conditions specified by the optional equipment. *9 Check the requirements of the computer and other devices to be connected, and make sure that all requirements are satisfied.

Dimensions

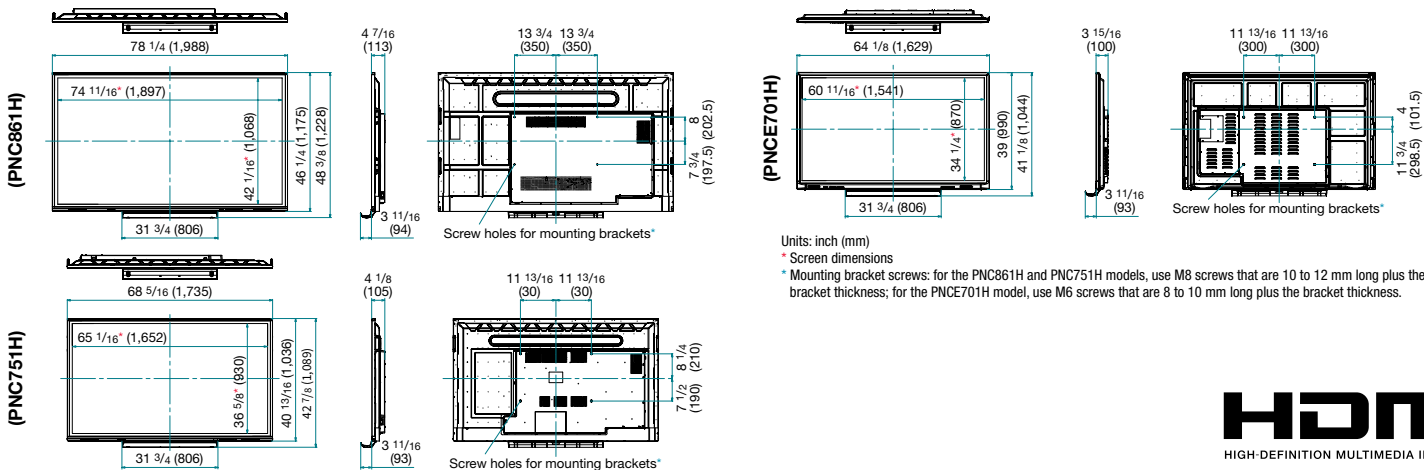

SHARP ELECTRONICS OF CANADA LTD.
 335 Britannia Road East, Mississauga, Ontario L4Z 1W9
 1-800-567-4277 • www.sharp.ca

©2019 Sharp Electronics of Canada Ltd.
 Printed in Canada.

Sharp, AQUOS BOARD and all related trademarks are trademarks or registered trademarks of Sharp Corporation and/or its affiliated companies. The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. QR Code is a registered trademark of DENSO WAVE INCORPORATED in Japan and other countries. Windows is a registered trademark or trademark of Microsoft Corporation in the US and/or other countries. Google Chrome and Built-in SoC are trademarks of Google LLC. Mac and macOS are trademarks of Apple Inc., registered in the US and other countries. Intel Core is a trademark of Intel Corporation or its subsidiaries in the US and/or other countries. Arm and Cortex are registered trademarks of ARM Limited (or its subsidiaries) in the US and/or elsewhere. All other brand names and product names may be trademarks or registered trademarks of their respective owners. All screen images appearing in this brochure are simulated. Design and specifications are subject to change without prior notice.