


Specifications

| Model Name | | 4PB43EJ2U | 4PB50EJ2U | 4PB55EJ2U | 4PB65EJ2U | 4PB75EJ2U | 4PB86EJ2U |
|---|-------------------------------------|--|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| LCD Panel | Diagonal size | 43" Class (42.5" diagonal) | 50" Class (49.5" diagonal) | 55" Class (54.6" diagonal) | 65" Class (64.5" diagonal) | 75" Class (74.5" diagonal) | 86" Class (85.6" diagonal) |
| | Brightness (Typ.) | 300 cd/m ² | | | 330 cd/m ² | | 380 cd/m ² |
| | Contrast Ratio | 1,000:1 | 5,000:1 | 1,300:1 | | 1,200:1 | |
| | Response Time | 8 ms | 6 ms | | 8 ms | | |
| | Max. Resolution | 3,840 x 2,160 pixels | | | | | |
| | Max. Display Colours (approx.) | 1.07 billion colours | | | | | |
| | Viewing Angle (H/V) | 176°/176° (CR ≥10) | | | | | |
| | Backlight | LED, Direct | | | | | |
| | Colour gamut | > NTSC 62% | | | | | |
| | HDR 10 | Yes | | | | | |
| Computer Input | Haze | Low | | | | | 28% |
| | Video | HDMI | | | | | |
| Video Colour System | Plug & Play | VESA DDC2B | | | | | |
| | | NTSC-M/PAL-N/PAL-M | | | | | |
| Terminal | Input Terminals *1 | HDMI x 3, Analog AV (3.5 mm-diameter mini stereo jack) x 1, ANT/Cable x 1, USB x 1 | | | | | |
| | Control Terminals *1 | Ethernet RJ-45 x 1, RS-232C (3.5 mm-diameter mini stereo jack) x 1 | | | | | |
| | Output Terminals *1 | Audio (3.5 mm-diameter mini stereo jack (L/R)) x 1 | | | | | |
| Installation | | Landscape | | | | | |
| Speaker Output | | 8 W + 8 W | | | | | |
| Power Supply *2 | | 110 V AC, 60 Hz | | | | | |
| Operating Temperature *3 | | 32°F to 104°F (0°C to 40°C) | | | | | |
| Main Accessories | Power Cord | 2 pin, US Type Plug x 1 | | | | | |
| | Remote Control | Yes | | | | | |
| | Battery for Remote | AAA x 2 | | | | | |
| | RS-232C D-sub 9 pin to 3.5Ø adapter | x 1 | | | | | |
| Power Consumption | 98 W | 130 W | | 180 W | 300 W | 380 W | |
| Dimensions (W x D x H) (approx.) (display only) | 37.7" x 2.8" x 22" | 43.8" x 2.8" x 25.3" | 48.3" x 2.9" x 28" | 56.9" x 2.9" x 32.9" | 65.9" x 3" x 37.8" | 75.7" x 3.66" x 43.4" | |
| Weight (approx.) (display only) | 14.6 lbs (6.6 kg) | 21.7 lbs (9.82 kg) | 28.3 lbs (12.8 kg) | 36.2 lbs (16.4 kg) | 62.2 lbs (28.2 kg) | 93.7 lbs (42.5 kg) | |


*1 Use a commercially available connection cable for PC and other video connections. *2 The AC power cord is an inlet type. The cable is bundled (2 pins). *3 Temperature conditions may change when using the monitor together with optional equipment. In such cases, please check the temperature conditions specified by the optional equipment.

Dimensions


4PB43EJ2U

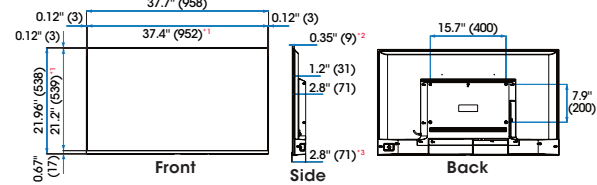


4PB50EJ2U

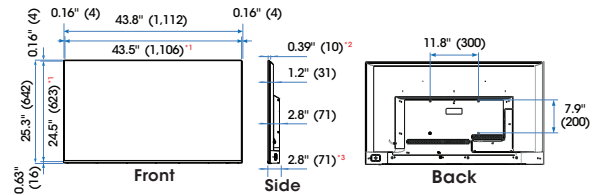


4PB55EJ2U

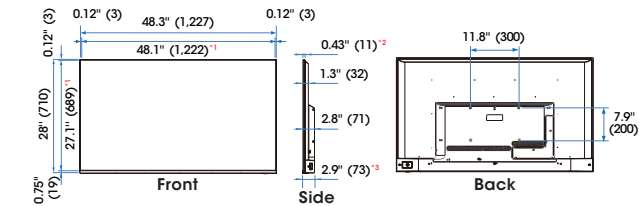


4PB65EJ2U

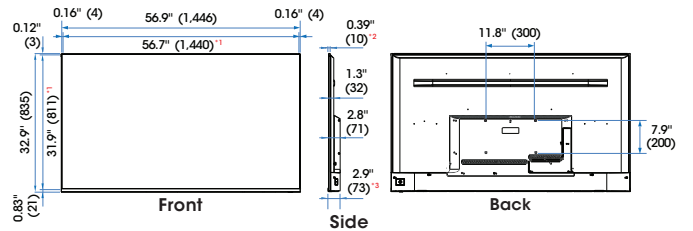

4PB75EJ2U

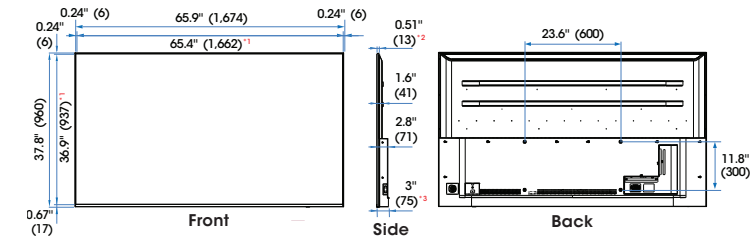

4PB86EJ2U

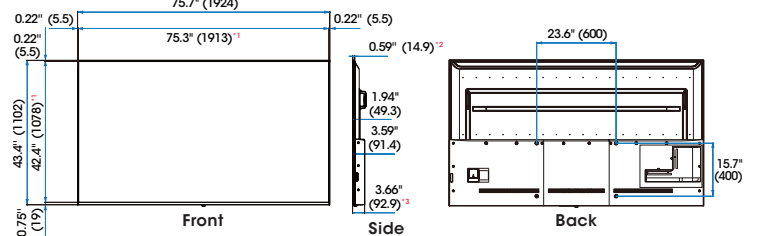

Units: inch (mm) *1. Active area *2. Thinnest part *3. Including projecting parts



SHARP
Be Original.

SHARP ELECTRONICS OF CANADA LTD.
335 Britannia Road East, Ste. 101
Mississauga, Ontario L4Z 1W9
1-800-567-4277 • www.sharp.ca

Printed in Canada.
VSG-VS-4PB-E-PDF-09/2024

Sharp is a registered trademark of Sharp Corporation. The terms HDMI, High-Definition Multimedia Interface and the HDMI logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. Manufactured under license from Dolby Laboratories. Dolby and the double-D symbol are trademarks of Dolby Laboratories. All other brand names and product names may be trademarks or registered trademarks of their respective owners. All screen images appearing in this brochure are simulated. Design and specifications are subject to change without prior notice.